

Böttcherin 60-F WEB

Cleaning Agent for Rollers and Blankets

Suitable for use in automatic cleaning units in newspaper presses, specifically designed for use in filtration systems.

Böttcherin 60-F WEB is developed for recycling after having passed a filtration unit. For this reason, a particular medium ensures that the emulsion from water and Böttcherin 60-F WEB will totally separate after a short time.

- based on aliphatic hydrocarbons
- flash point > 62 °C
- temporarily water miscible, free of aromatics, corrosion inhibited
- very good wetting of brush rollers, therefore no spraying during cleaning process
- emulsifying performance designed for washing units (esp. Rotoclean)
- increased cleaning effect
- designed for use in filtration systems, effective particularly in newspaper presses
- low evaporation and high washing performance
- environment friendly

Do not contaminate with white spirit or other washes or press room chemicals, if using in filtration systems. Use pre-filtering of return waste if excessive paper dust is present. For effective filtration, ensure minimum environment temperature is above 20 °C.

Regularly clean the circulation systems to reduce algae build up. Use BöttcherPro Calcit as a re-hardener for RO and soft water.

Böttcherin 60-F WEB is approved by manroland, Koenig & Bauer, Technotrans and Rotoclean for use in their machines.

Application

Features

Note





- 200 litre drum
- 1000 litre container

Package

Böttcherin 60-F WEB classified and marked in accordance with EC - Directive 1999/45/EC - in its latest version. Böttcherin 60-F WEB is not a dangerous good in the sense of national and international transport regulations.

Marking

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
50933 Cologne, Germany
Phone +49 (0) 221 4907 - 1
Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

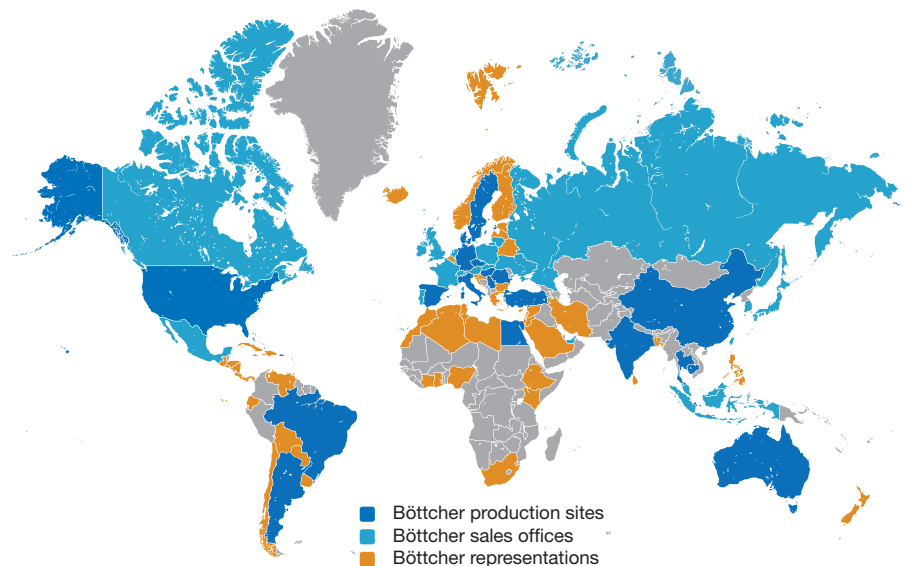

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.