

BöttcherFount S-3010⁺

Fountain Solution Additive

BöttcherFount S-3010+ is a fountain solution additive for sheet-fed offset and continuous form printing.

Application

- use at a concentration of 2 - 3 % for IPA-reduction to 6 - 8 %
- very stable ink-/water-balance
- reduced water pick-up of the ink, therefore higher ink densities obtained
- fast start-up and stable printing for long runs
- for water hardness 5 - 20° dH (total hardness)
- pH-value 4.8 - 5.0 (depending on water hardness)
- reduced calcium deposits on ink rollers
- suitable for UV and Hybrid inks as well as special inks containing metallic pigments
- corrosion inhibited
- minimises build-up of paper dust and ink on the blanket
- suitable for CTP plates
- effective plate protection during press stops
- suitable for copper rollers
- increased conductivity per % input: 390 µS/cm
- density 1.10 (kg/l)

Features

Before applying BöttcherFount S-3010+, the fountain system must be completely emptied and cleaned thoroughly, preferably using BöttcherPro Hydroclean.

Use BöttcherPro Calcit as a re-hardener for RO and soft water.

Note





- 20 kg can
- 200 kg drum

Package

BöttcherFount S-3010+ is classified according to EC-Directive 199/45/EC - in its latest version – and does not need to be marked.

Marking


All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.

Felix Böttcher GmbH & Co. KG

Headquarter
 Stolberger Str. 351 - 353
 50933 Cologne, Germany
 Phone +49 (0) 221 4907 - 1
 Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

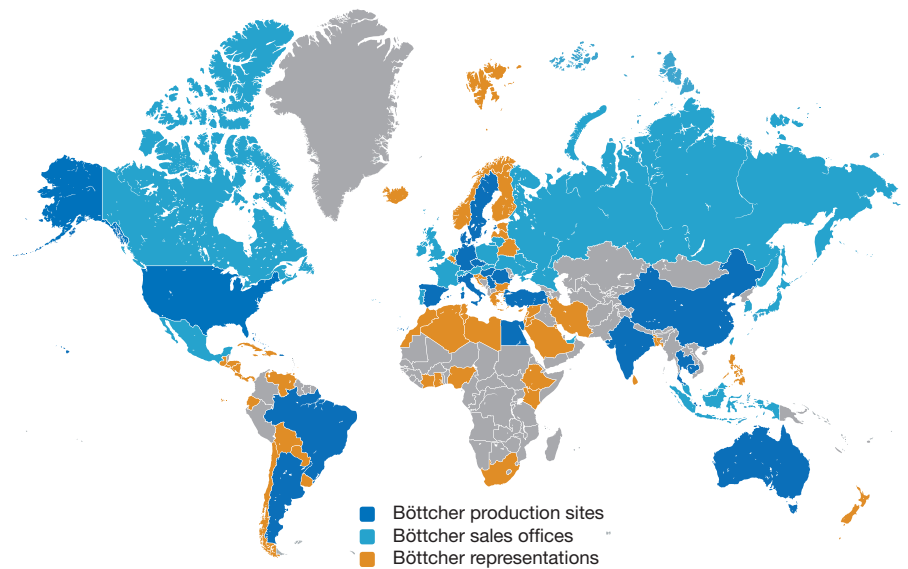

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.