

# BöttcherFount S-3012

## Fountain Solution Additive

---

BöttcherFount S-3012 is a fountain solution additive for sheet-fed offset.  
For soft and hard water.

*Application*

- standard dosage 2 - 3 %
- for IPA-reduction to 6 - 8 %
- very stable ink-/water balance
- reduced and stable water pick up of the ink, therefore higher ink densities obtained
- fast restarts and stable printing for long runs
- for conventional and film dampening systems
- good printing plate protection
- for water hardness 0 - 25° dH (total hardness)
- pH-value 4.9 - 5.2 (according to water hardness)
- suitable for UV printing as well
- effective prevention of foam
- increased conductivity per % input: 480 µS/cm
- density 1.05 (kg/l)

*Features*

Before applying BöttcherFount S-3012, the fountain system must be completely emptied and cleaned thoroughly, preferably using BöttcherPro Slimex.

Use BöttcherPro Calcit as a re-hardener for Ro- and soft water.

*Note*





- 20 kg can
- 200 kg drum

*Package*

BöttcherFount S-3012 is classified and marked in accordance with EC-Directive 1999/45/EC – in its latest version. BöttcherFount S-3012 is not a dangerous good in the sense of national and international transport regulations.

*Marking*

All our product information sheets, as well as our contact data you will find on the internet [www.boettcher-systems.com](http://www.boettcher-systems.com).


## Felix Böttcher GmbH & Co. KG

### Headquarter

Stolberger Str. 351 - 353  
50933 Cologne, Germany  
Phone +49 (0) 221 4907 - 1  
Fax +49 (0) 221 4907 - 435  
koeln@boettcher-systems.com



[www.boettcher.de/contact](http://www.boettcher.de/contact)

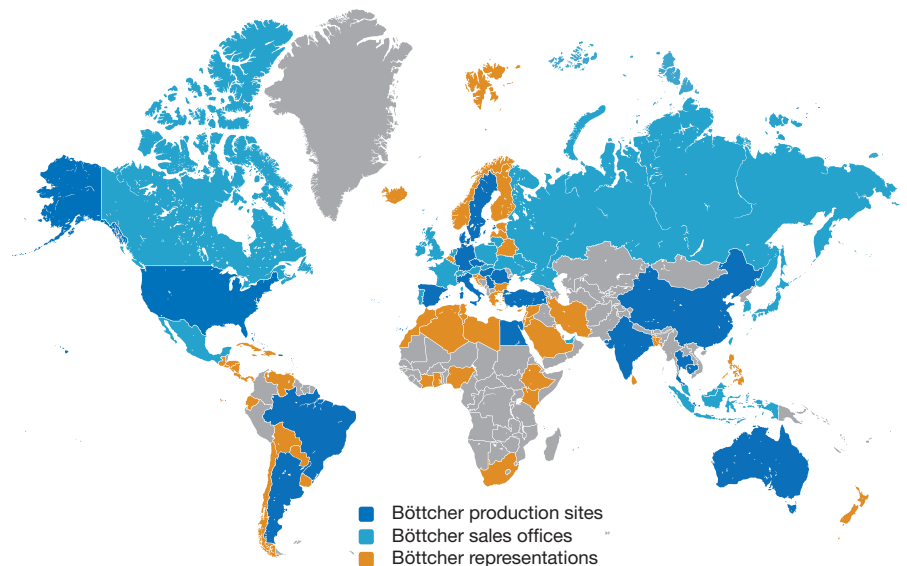

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.