









BöttcherPro Magnesit

Water Re-Hardener for dampening solution

BöttcherPro Magnesit is a water rehardener for use in conjunction with reverse osmosis water or with very soft water, to standardize hardness.


Application

-  For rehardening of demineralized water from RO-units
-  For very soft water (0-4° dH total hardness)
-  dosage 0,5 %
-  constant water hardness of 10° dH (total hardness)
-  no alteration of pH-value
-  stabilizes the ink water balance
-  reduces emulsification of the ink
-  reduces bacteria growth in fountain systems

Features

BöttcherPro Magnesit is added to RO-water or the soft water feed lines to the circulation system by the use of automatic dosage pumps. BöttcherPro Magnesit works well with BöttcherFount products. After adding BöttcherPro Magnesit to the RO-water the concentration can be determined by using a conductivity meter.

conductivity of BöttcherPro Magnesit in demineralised water

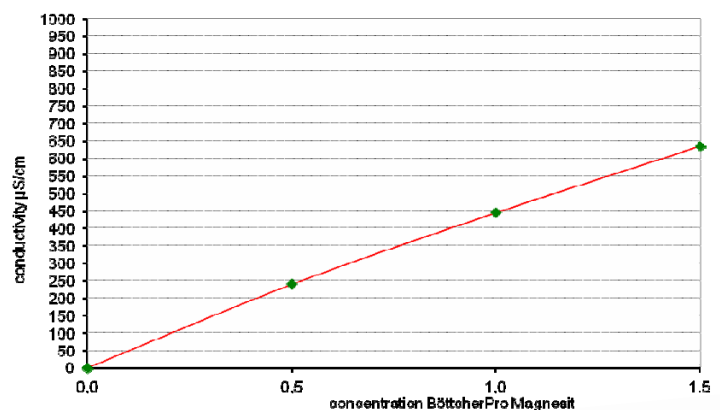

Note





- 20 kg can
- 200 kg plastic drum
- 1000 kg IBC

Package

All our product information sheets, as well as our contact data you will find on the internet www.boettcher-systems.com.


Felix Böttcher GmbH & Co. KG

Headquarter

Stolberger Str. 351 - 353
50933 Cologne, Germany
Phone +49 (0) 221 4907 - 1
Fax +49 (0) 221 4907 - 435
koeln@boettcher-systems.com



www.boettcher.de/contact

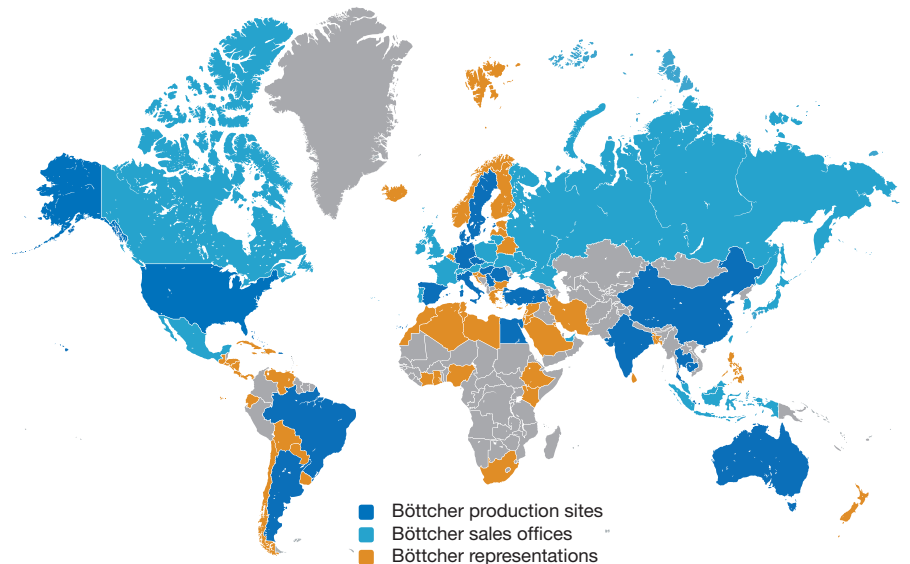

The purpose of these technical data is to assist our customers. We list general experience and laboratory test. Translation of these to actual applications is, however, subject to a variety of factors which are beyond our control. We ask for understanding that claims can not be based upon them.